

Kinetico



PREMIER

SERIES® XP

WATER SOFTENERS

Model Q850 XP

Design Specifications		
Flow Range (15/30 psig / 1-2 Δ bar)	6.0 - 12.0 gpm	18.9 - 32.9 Lpm
Flow Configuration	Alternating	
Pressure Range	25 - 125 psi Dynamic Pressure	2.0 - 8.6 bar Dynamic Pressure
Temperature Range	35 - 120 ° F	2 - 49 ° C
pH Range	5 - 10 SU	
Free Chlorine Cl ₂ (Max.)	0.0 mg/L	
Hardness as CaCO ₃ (Max.)	33 gpg	564 mg/L
System Components		
Upper Media Vessel (Qty. 2)	8" x 17"	203 mm x 432 mm
Vessel Construction	Fiberglass Wrapped Engineered Plastic	
Empty Bed Volume	0.40 cubic feet	11 liters
Media Volume	0.40 cubic feet	11 liters
Media Type	Fine Mesh Cation Resin	
Lower Media Vessel (Qty. 2)	8" x 17"	203 mm x 432 mm
Vessel Construction	Engineered Plastic	
Empty Bed Volume	0.40 cubic feet	11 liters
Media Volume	0.40 cubic feet	11 liters
Media Type	Activated Carbon	
Riser Tube	1" ABS	25 mm ABS
Upper Distributor	0.009" Slots, Engineered Plastic Basket	0.23 mm Slots, Engineered Plastic Basket
Lower Distributor	0.009" Slots, Stainless Steel Flat Plate	0.23 mm Slots, Stainless Steel Flat Plate
Regeneration Control	Non-electric Use Meter	
Regeneration Type	Countercurrent	
Metering Flow Range	0.30 - 25.0 gpm	1.1 - 94.6 Lpm
Connections		
Inlet / Outlet Connection	Custom E-clip Adapter	
Drain Connection	0.5" Tube	
Brine Line Connection	0.375" Tube	
Power	None	
System Part Numbers		
Premier Q850 XP, no brine drum	16538	
Premier Q850 XP, 18" x 35" brine drum	16925	
Dimensions and Weight		
Height	42 in.	1,067 mm
Width	17 in.	432 mm
Depth	8 in.	203 mm
Shipping Weight	160 lbs.	73 kg
Operating Weight	200 lbs.	91 kg
Regeneration Specifications		
Regeneration Volume	15 gallons	56 liters
Regeneration Time	11 minutes	
Backwash Flow Control	3.50 gpm	13.5 Lpm
Brine Refill Flow Control	0.40 gpm	1.5 Lpm

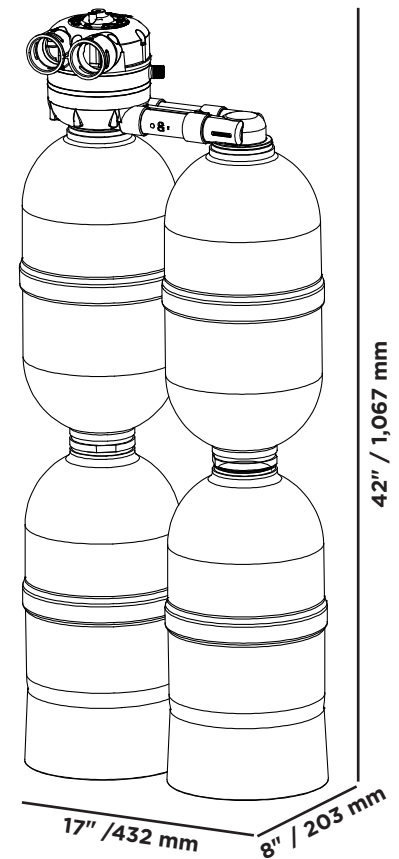

Brine Tank Options

Tank Description	12" x 16" x 20"		18" x 35"	
Brine Tank Part Number	7202		7938A	
Tank Height	20"	51 cm	35"	89 cm
Tank Footprint	12" x 16"	30 x 41 cm	18" DIA	46 cm DIA
Material	HDPE		HDPE	
Salt Capacity	50 lbs.	23 kg	250 lbs.	114 kg

Salt Setting		Capacity		Efficiency		Dosing	
0.8 lbs.†	0.36 kg†	4,338 grains	281 grams	5,423 gr./lb.	775 grams/kg	2.0 lbs./ft³	0.03 kg/l
1.0 lbs.*	0.45 kg*	5,100 grains	330 grams	5,100 gr./lb.	729 grams/kg	2.5 lbs./ft³	0.04 kg/l

*Not a certified setting by WQA

† 0.8 salt setting is only available with the 12" x 16" x 20" brine drum.

Kinetico
PREMIER
SERIES® XP
WATER SOFTENERS

Model Q850 XP

Operating Profile

Softener shall remove hardness to less than 1 gpg (17 mg/L) when operated in accordance with the operating instructions. System shall provide continuous softened and filtered water through the use of a quad (four tanks) configuration. This quad configuration shall operate with all tanks on-line during service. During regeneration cycles, one set of tanks (softener and filter) shall provide water to service and to the regenerating tank. A water meter shall initiate system regeneration. The water meter shall measure the processed volume and be adjustable. Service flow shall be upflow through the tanks, and regeneration flow shall be downflow.

Regeneration Control Valve

The regeneration control valve shall be top mounted (top of media tank) and manufactured from non-corrosive materials. Control valve shall not weigh more than four pounds. Control valve shall provide service and regeneration control for two media tanks. Inlet and outlet ports shall accept a quick connect, double O-ring sealed adapter. Interconnection between tanks shall be made through the regeneration valve with a quick connect adapter. Control valve shall operate using a minimum inlet pressure of 15 psi (1 bar). Pressure shall be used to drive all valve functions. No electric hook-up shall be required. Control valve shall incorporate four operational cycles including; service, brine draw, slow rinse, and a combined fast rinse and brine refill. Service cycle shall operate in an upflow direction. The brine cycle shall flow downflow, opposite the service flow, providing a countercurrent regeneration. Control valve shall contain a fixed orifice eductor nozzle and self-adjusting backwash flow control. The control valve will prevent the by-pass of hard water to service during the regeneration cycle

Media Tanks

The tanks shall be designed for a maximum working pressure of 125 psi (8.6 bar) and hydrostatically tested at 300 psi (20.7 bar). Tanks shall be made of nylon wrapped with a 2.5 in. threaded top opening. Each tank shall be NSF approved. Upper and lower distribution system shall be of a slot design. They will provide even distribution of regeneration water and the collection of processed water.

Media

Each unit shall include 0.4 ft³ (11 liters) of fine mesh cation resin and 0.4 ft³ (11 liters) of activated carbon.

Brine System

A combination salt storage and brine production tank shall be manufactured of corrosion resistant, rotationally molded rigid polyethylene. The brine tank shall have a chamber to house the brine valve assembly. The brine float assembly shall allow for adjustable salt settings and shall provide for a shutoff to the brine refill. The brine tank shall include a safety overflow connection to be plumbed to a suitable drain.